




Ver.2.01
 Ver.2.03
 ATX 12V
 PFC

Voltage Current		AC Input		DC Output						
		115 V 60Hz	230 V 50Hz	+5V	+3.3V	+12V	-12V	-5V	Ver.2.01 +5Vsb	Ver.2.03 +5Vsb
	PM-200	6A	3A	20A	14A	6A	0.5A	0.5A	1.2A	1.5A
				Max 115W						
	PM-230	6A	3A	23A	14A	9A	0.8A	0.5A	1.2A	1.5A
				Max 115W						
	PM-250	7A	4A	25A	14A	10A	0.8A	0.5A	1.2A	1.5A
				Max 125W						
	PX-200	6A	3A	20A	14A	6A	0.5A	0.5A	1.2A	1.5A
				Max 115W						
	PX-230	6A	3A	23A	14A	9A	0.8A	0.5A	1.2A	1.5A
				Max 115W						
	PX-250	7A	4A	25A	14A	10A	0.8A	0.5A	1.2A	1.5A
				Max 125W						
	PX-300	7A	4A	30A	14A	12A	0.8A	0.5A	1.2A	1.5A
				Max 150W						
Wire Color				RED	ORANGE	YELLOW	BLUE	WHITE	PURPLE	PURPLE


PS-ON Remote (Green)(Color)
 PG POK (Gray)(Color)

WARNING:
 HAZARDOUS VOLTAGES
 CONTAINED WITHIN THIS POWER
 SUPPLY. DO NOT REMOVE THIS
 COVER TRAINED SERVICE PEOPLE
 ONLY NO SERVICEABLE
 COMPONENTS INSIDE.



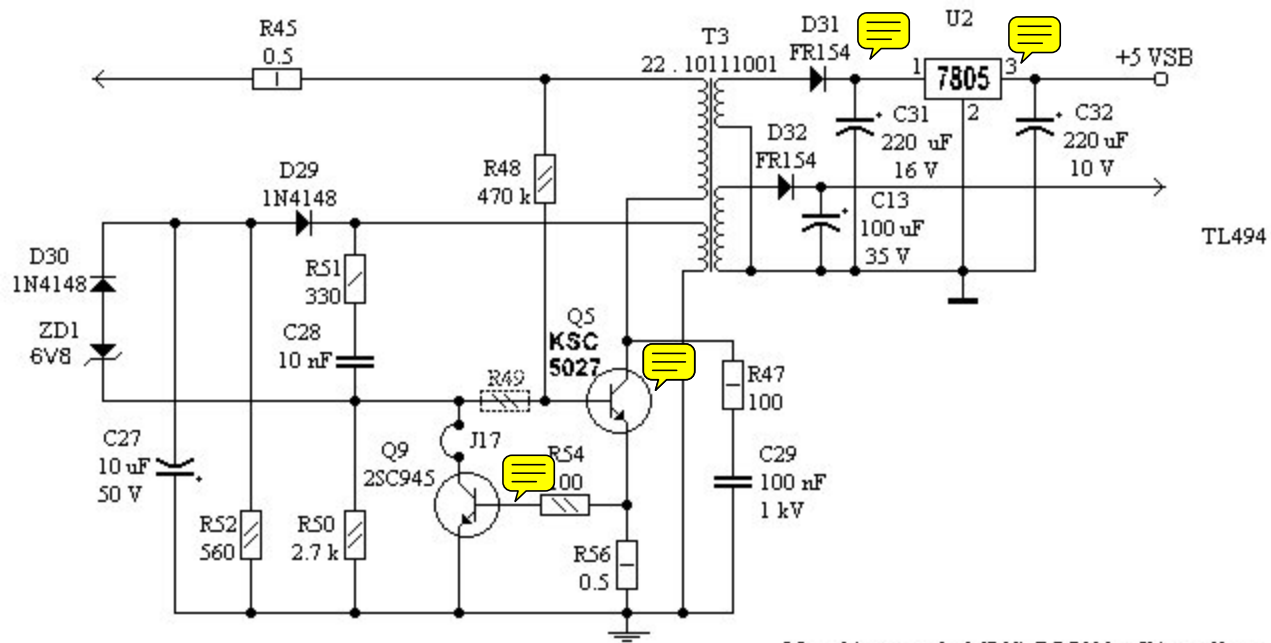

MaxUs model PM-230W - Standby

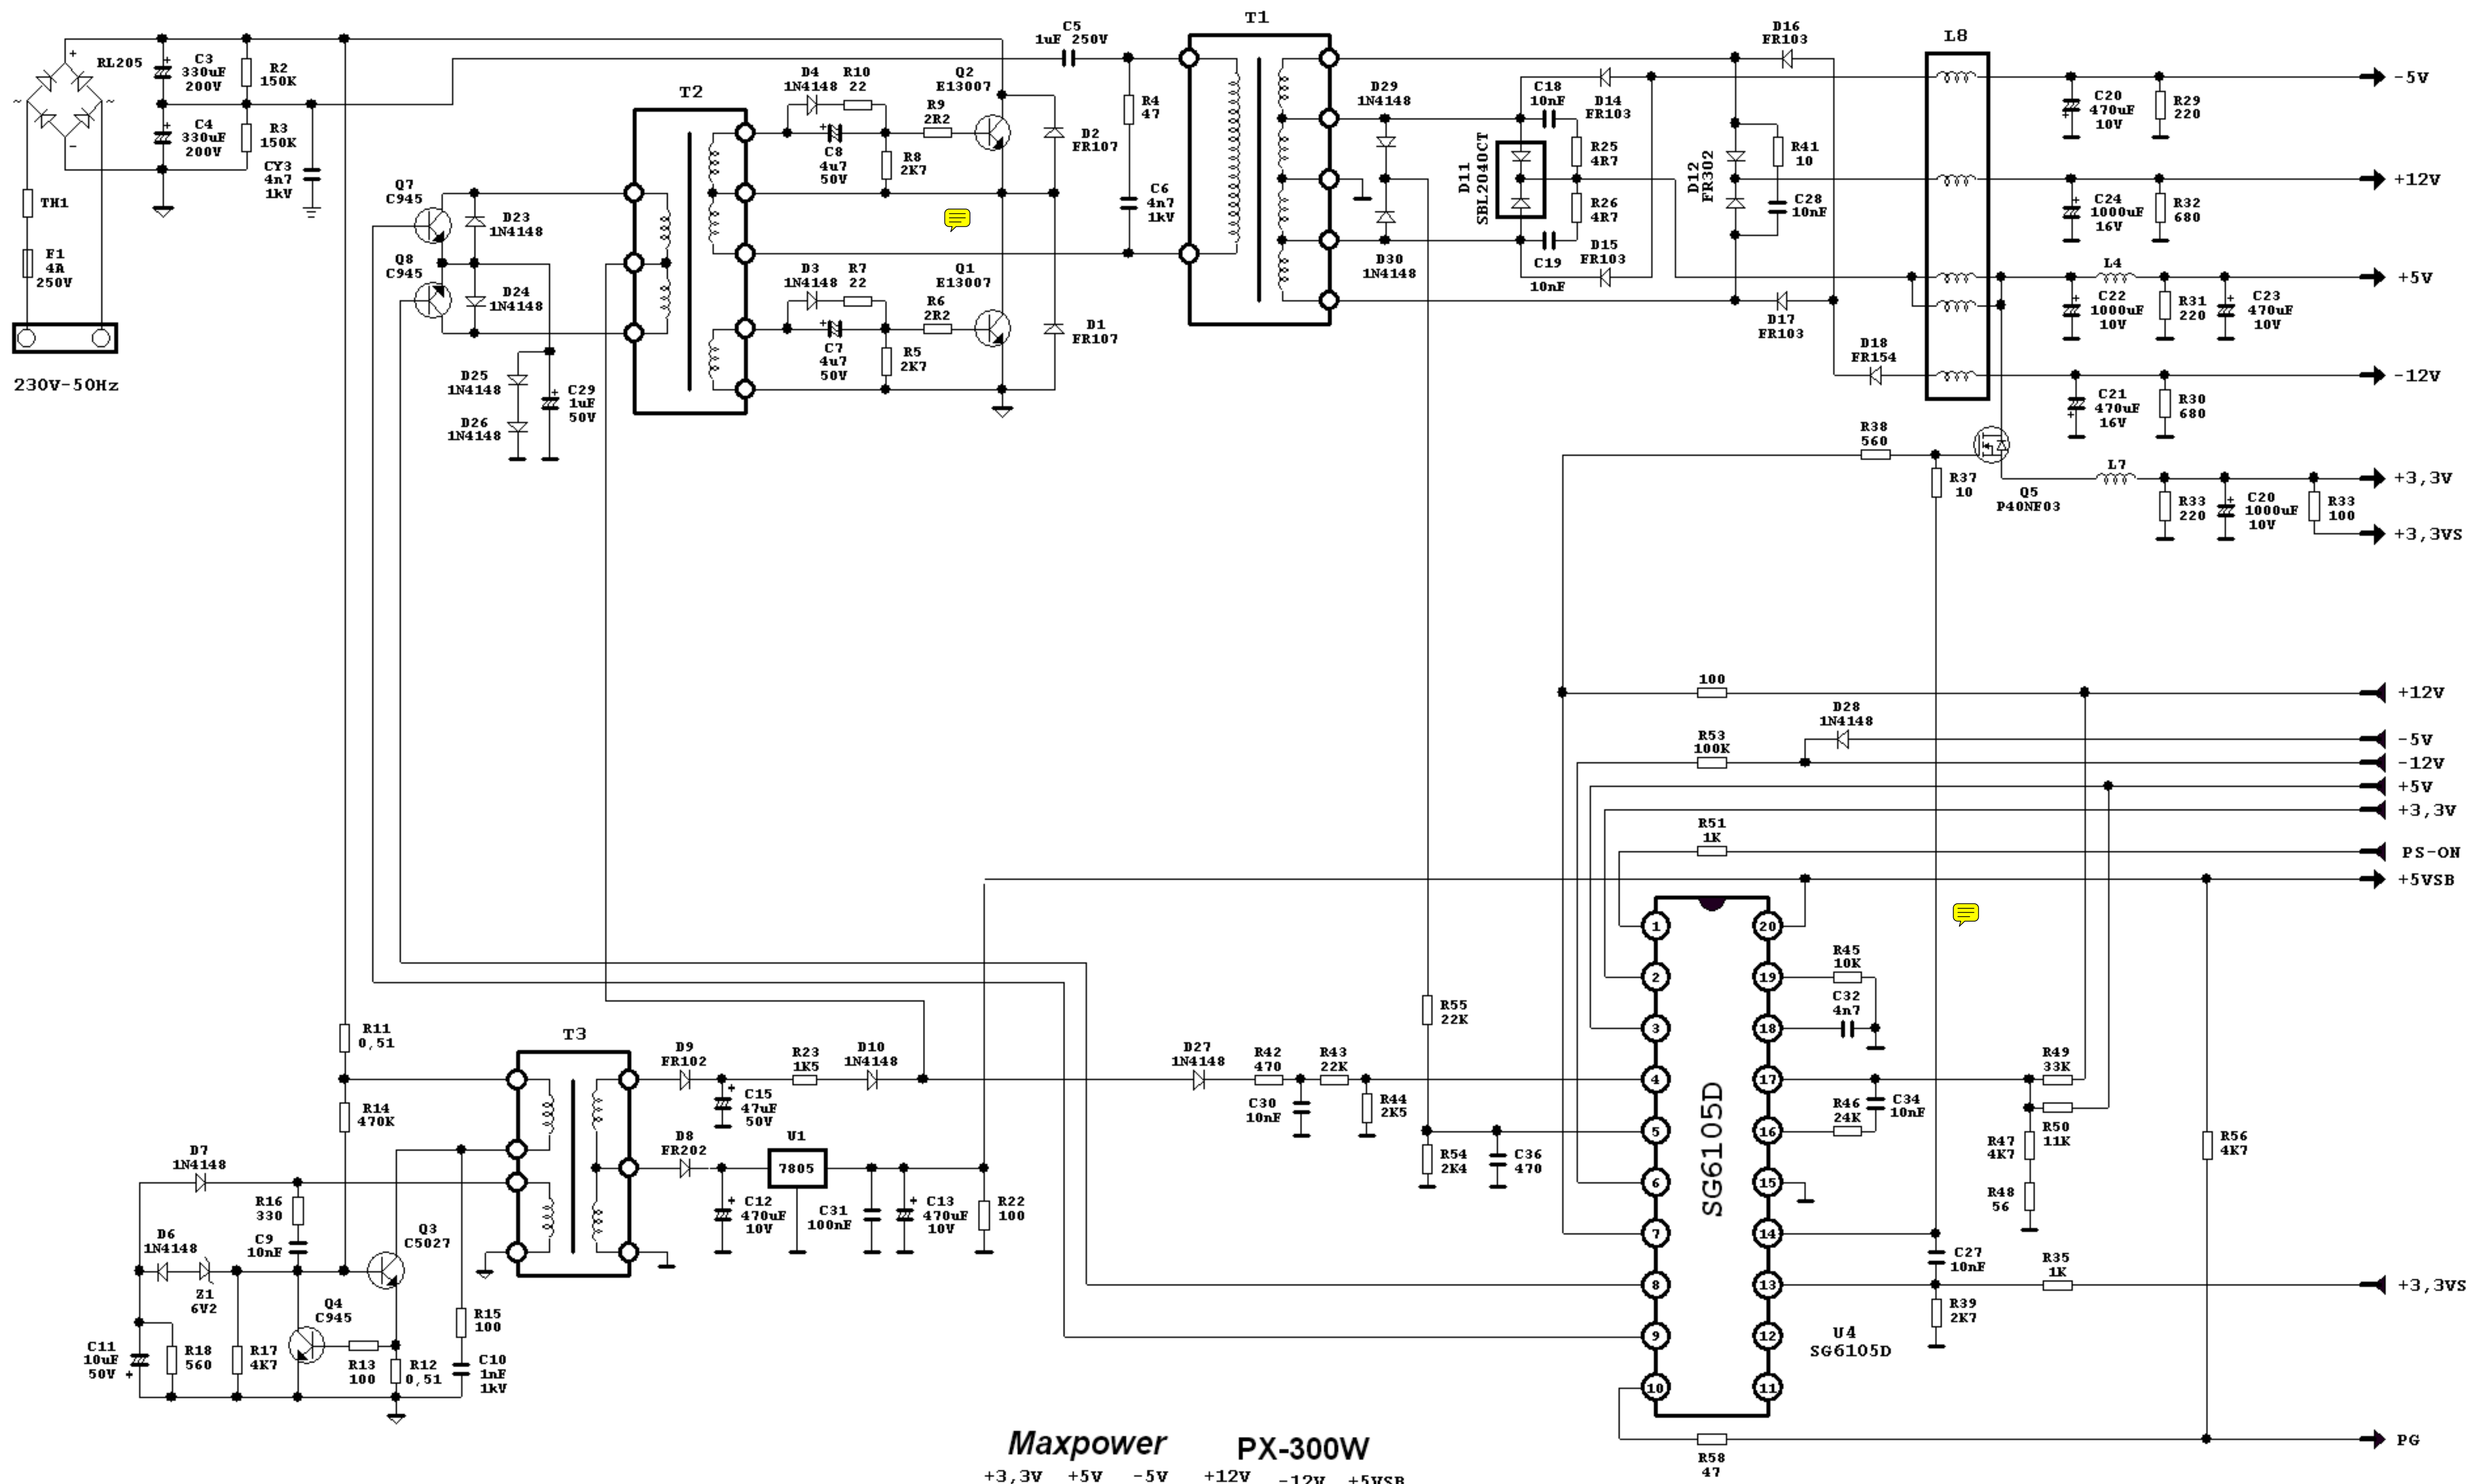

Maxpower PX-300W

Output Voltage	Output Current
+3,3V	14A
+5V	30A
-5V	0,5A
+12V	12A
-12V	0,8A
+5VSB	1,2A